

Washer extractors

W4280X, W4350X, W4600X

Features and benefits

- Available with two types of electronic controls:
 - Exacta Control® with up to 28 fixed wash program combinations. Some parameters programmable (only W4280X, W4350X)
 - Clarus Control fully programmable, up to 192 programs
- Large door opening for easy loading/unloading
- Super Balance, software ensure a quick distribution/extraction cycle with low noise/vibration level
- Frequency controlled motor
- Prepared for manual or automatic detergent supply
- Stainless steel in all vital parts for high degree of rust protection
- Stainless steel front panels and powder painted side panels
- Non-heated or direct steam heating
- Electrical heating (only W4350X, W4600X)

Main options

- Stainless steel panels
- Coin-meter (only W4280X, W4350X)
- Five compartment supply injector (only W4600X)
- Third water inlet valve (only W4600X)









Main specifications			W4280X		W4350X		W4600X	
Rated capacity, filling factor 1:10	kg/lb		28/65		35/80		60/135	
Drum, volume	litre		280		350		600	
diameter	ø mm		830		920		980	
Extraction max	rpm		805		650		630	
G-factor			300		220		220	
Heating alternatives, 230/400V	electricity	kW	-		25		40.8	
	steam		x		x		x	
	non-heated		x		x		x	
Consumption data "Normal 60°C" 1:10*			Steam		El	Steam	El C/H	Steam C/H
Total time	min		**		49	**	45	**
Water consumption (cold/hot)	litre		312/0		320/67	387/0	598/105	598/105
Energy consumption (motor/heating)	kWh		0.7/0		1.1/3.4	1.1/0	2.1/5.4	2.1
Steam consumption	kg		8.3		-	10.2	-	8***
* Water temperature 15°C cold water and 65°C hot water.								
** Depending on steam pressure.								
*** Steam consumption, cold water only, 18kg								

Certified in accordance with ISO 9001 and ISO 14001 and approved IP 24D.

Electrical connections*			W4280X	W4350X	W4600X
Heating	Voltage				
El.	230V 3AC 50/60Hz	kW(A)	-	25(63)	40.3(80)
	400-415V 3N AC 50Hz	kW(A)	-	25(50)	40.8(63)
Steam or non-heated	208-240V 1AC 50/60Hz	kW(A)	1.5(16)	2.5(16)	-
	230V 3AC 50/60Hz	kW(A)	-	-	2.1(10)
	400-415V 3AC 50Hz	kW(A)	-	-	2.8(10)
Water and steam connection					
Water valves	DN/inch		20/ 3/4	20/ 3/4	25/1
Rec. water pressure	kPa		200-600	200-600	200-600
Capacity at 300 kPa	l/min		60	60	110
Drain valve	Ø mm/inch		75/3	75/3	75/3
Steam valve	DN/inch		15/ 1/2	15/ 1/2	20/ 3/4
Rec. steam pressure	kPa		300-600	300-600	300-600
Floor requirements					
Frequency of the dynamic force	Hz		13	10.8	10.5
Max floor load at extraction	kN		5 ± 11.5	6.5 ± 14	9 ± 22
Heat emission					
% of installed power, max			5	5	5
Shipping data					
Weight	net, kg		380	560	775
Dimensions					
A	Width		935	1085	1145
B	Depth		970	1105	1185
C	Height		1455	1570	1670
D			515	530	600
E			120	120	120
F			400	525	800
G			55	55	65
H			1365	1465	1585
I			230	185	305
K			1325	1445	1540
L			315	315	75
M			395	395	215
N			120	120	105
O			170	190	570
P			-	-	1390
R			-	-	50
1	Control panel		6 Cold or hot water (optional for W4600X)		
2	Soap box (only W4280X, W4350X)		7 Steam connection		
2A	Soap box (only W4600X)		8 Drain		
3	Door opening ø410 (W4280X), ø535 (W4350X, W4600X)		9 Electrical connection		
4	Cold water		10 Liquid detergent supply		
5	Hot water		11 Water reuse		

* Other voltages available, see installation manual.

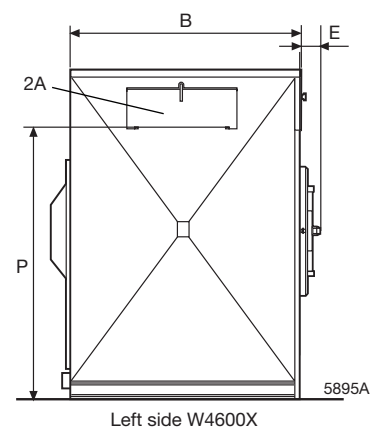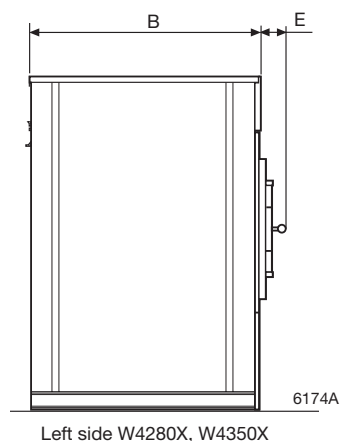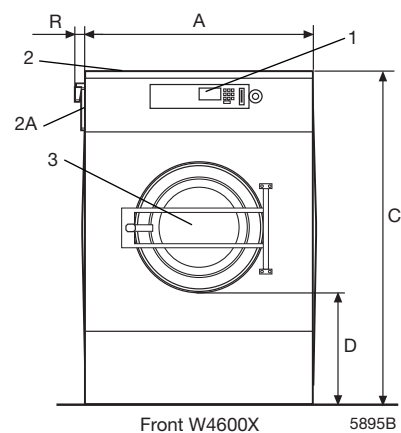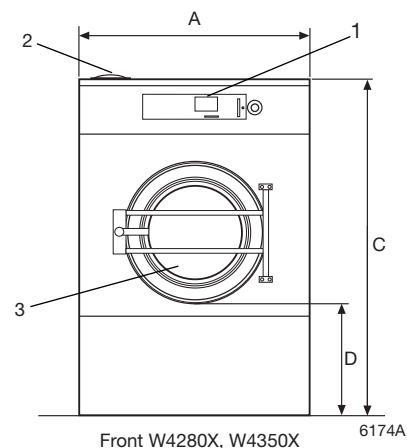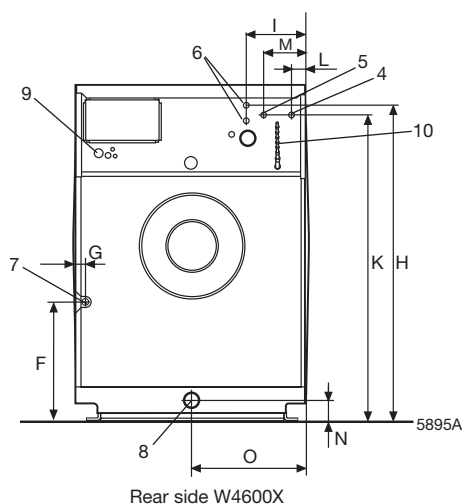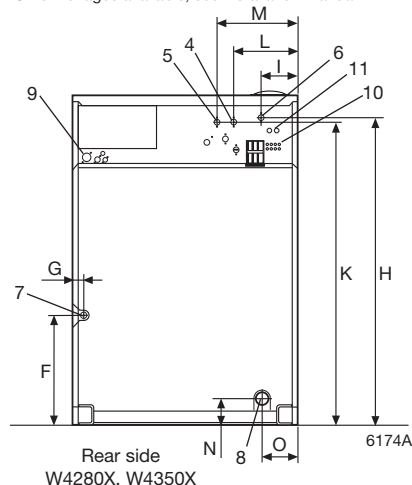

Electrolux

www.electrolux.com/professional

Share more of our thinking at www.electrolux.com

Art. No. 43890341/01 07.04
We reserve the right to alter specifications without notice.