

Washer extractor

W4330N

Features and benefits

- Solid mount construction with robust frame in galvanized steel
- Extremely low water and energy consumption – see table below
- Available with two types of program controls:
 - Classic Control with:**
 - Program timer available in two versions; either with 5 wash programs (laundrettes) or 10 wash programs (other laundries)
 - Compass Control® with:**
 - Large display and one dial for easy program selection
 - Language selection
 - Two Quick Start buttons for frequently used wash programs
 - Wash program packages optimized on *Economy*, *Performance* and *Time*
- Four compartment soap box for manual dosing of powder or liquid detergent
- Large door opening for easy loading/unloading
- Stainless and galvanized steel in all vital parts for high degree of rust protection

Main options

- Automatic liquid detergent supply (optional I/O board for Compass Control)
- Stainless steel front panel
- Connection of coin meter



Compass Control



Classic Control

Main specifications				W4330N	
Max. capacity		kg/lb		35/75	
Drum, volume		litre		330	
diameter		ø mm		795	
Extraction		rpm		427	
G-factor				81	
Heating alternatives, 230/400V	electricity	kW		19.2	
	steam			x	
	non-heated			x	
Consumption data "Normal 60°C" * (3G01)				EI	Steam
Total time	min			50	**
Water consumption (cold/hot)	litre			234/62	234/62
Energy consumption (motor/heating)*	kWh			0.4/1.6	0.4
Steam consumption	kg			–	2.4
* Water temperature 15°C cold water and 65°C hot water.					
** Depending on steam pressure.					


Certified in accordance with ISO 9001 and ISO 14001 and approved IP 24D.

Electrical connections*			W4330N
Heating	Voltage		
El.	230V 3 AC 50 Hz	kW(A)	20(63)
	240V 3AC 60 Hz	kW(A)	20.7(63)
	400V 3N AC 50 Hz	kW(A)	19.2(35)
Steam or non-heated	230V 3AC 60 Hz	kW(A)	1.9(10)
	240V 3AC 60 Hz	kW(A)	1.9(10)
	400V 3N AC 50Hz	kW(A)	1.7(10)
Water and steam connection			
Water valves	DN		20
Water pressure	kPa		150-400
Capacity at 300 kPa	l/min		60
Drain valve	Ømm		75
Draining capacity	l/min		150
Steam valve	DN		15
Steam pressure	kPa		300-600
Liquid detergent supplies			5
Floor requirements			
Frequency of the dynamic force	Hz		7.5
Max floor load at extraction	kN		3.8 ± 6.0
Sound levels			
Sound pressure level**	dB(A)		70
Sound power level (IEC 60704-2-4)	dB(A)		76
Heat emission			
% of installed power, max			5
Shipping data			
	net, kg		330
	crated, kg		350
Shipping volume	m ³		1.82
Accessories			
Hose kits for water or steam			x
Dimensions in mm			
A Width			910
B Depth			1040
C Height			1445
D			500
E			1075
F			1155
G			45
H			1365
I			160
K			1325
L			245
M			1155
N			280
O			325
P			100
R			210
1 Electrical connections	6 Liquid supply connections		
2 Cold water	7 Control panel		
3 Hot water	8 Soap box		
4 Steam connection	9 Connections for water re-use		
5 Drain	10 Door opening ø435		


Front and side panels in light grey with "Blue Wave" on front panel (RAL 260 70 05, 250 60 30)

* Other voltages available, see installation manual


** Approx. value at operators position in a mid-size laundry room

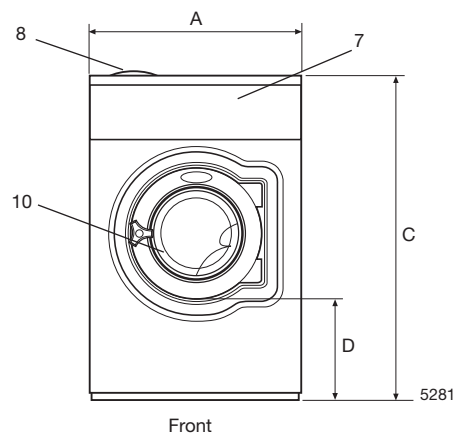

Front

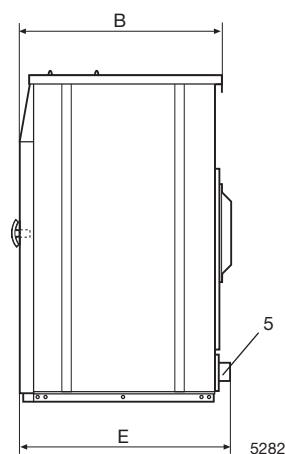

Right side

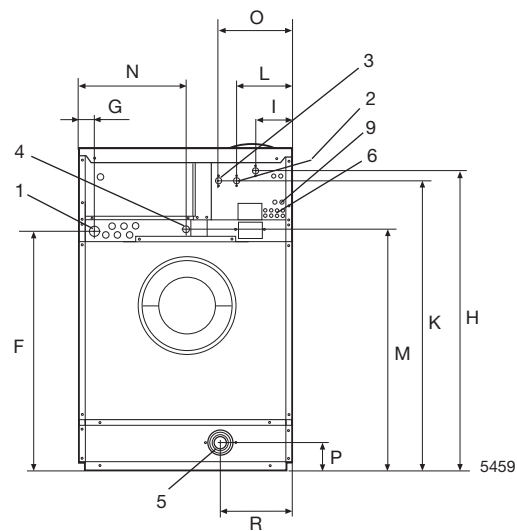

Rear side